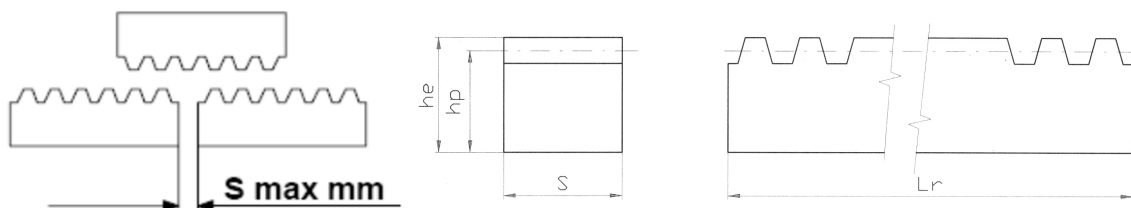

Modul: 1 / 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6


modul {typ}	hp mm	he x S mm	S mm	počet zubů				délka v mm (Lr)				hmotnost v kg			
				500	1000	2000	3000	500	1000	2000	3000	500	1000	2000	3000
1	14	15x15	0,5	159	318	636	955	449,51	999,02	1998,05	3000,22	0,820	1,500	3,100	4,900
1,5	15,5	17x17	0,6	106	212	424	637	449,51	999,02	1998,05	3001,79	1,000	2,000	4,000	6,100
2	18	20x20	0,6	80	159	318	478	502,65	999,02	1998,05	3003,36	1,400	2,700	5,400	8,400
2,5	22,5	25x25	0,7	64	127	255	382	502,65	997,45	2002,77	3000,22	2,100	4,300	8,600	11,900
3	27	30x30	0,8	53	107	213	319	499,51	1008,45	2007,48	3006,51	3,100	6,300	12,500	18,600
	21	25x25										1,800	3,650	7,300	10,900
4	26	30x30	0,8	40	80	159	239	502,65	1005,31	1998,05	3003,36	3,050	6,000	11,900	18,100
	36	40x40										5,500	11,100	22,000	31,300
5	45	50x50	1,0	32	64	128	191	502,65	1005,31	2010,31	3000,22	8,300	17,500	34,600	45,300
6	54	60x60	1,0	27	53	106	...	508,93	999,02	1998,05	...	12,650	25,000	51,000	...

Technická specifikace:

Tolerance na jedné rozteči +/-20um
 Tolerance na všech roztečích +/-30um na 500mm
 Stupeň opracování zubů je od 8 do 9 podle DIN3962/63/67
 Přímé ozubení
 Úhel záběru 20 °
 Materiál C45 E UNI EN 10083-1

ukončení hřebenů na obou koncích:

přízpůsobené pro kontinuální montáž
 možno dodat broušené i nebroušené